


FLEX BON

Seamless "Poured" Flooring



FLEXBON BLOWER DIAGRAM AND DIMENSIONS

Thank you for inquiring about our flake blower. Over the past 25 years I haven't seen any other commercial blower do a better job than this one, which includes my modifications. Below are two photos of the blower we have been using without problems for the past 25 years.

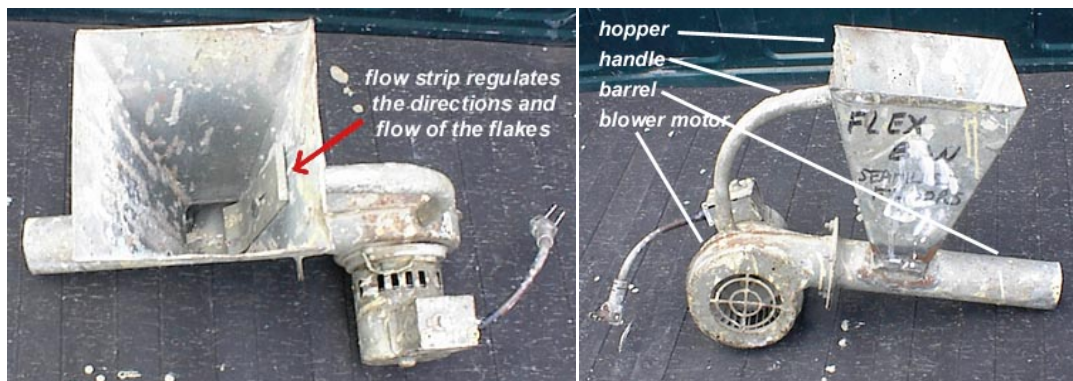

The blower motor is available through the W.W. Grainger catalog, <http://www.grainger.com> (type 4C443 in the "search" box using "Grainger Item #" as a search criteria.) The other components are made from sheet metal, available at any quality hardware or home improvement store.

DIMENSIONS:

- Top of Hopper: 7" x 7"
- Bottom of Hopper: 2"x 2"
- Height of Hopper: 9-1/2", hopper fits into barrel, leaving approx. 1/2" space between bottom of hopper and bottom of inside of barrel.
- Barrel Length: 9-1/2", Diameter: 2"
- Inside Hopper is a 2"x7" metal strip with a curve on the bottom, attached to back inside of hopper with a wing nut. This strip is adjustable up or down by approximately 1-1/2". Its purpose is to control direction and air flow for flakes.

You'll need the proper tools to bend and crimp the sheet metal. Also, you'll need to weld the handle and manufacture the flange on the motor end of the blower barrel.

If you have any questions about the manufacture of this blower, please e-mail me at flexbon@flexbonflooring.com or call me toll-free at 1-888-331-3860.

Thank you!

Randy Johnson